



DART DM7x3-Form 1

Dynamically mixed continuous flow reactors

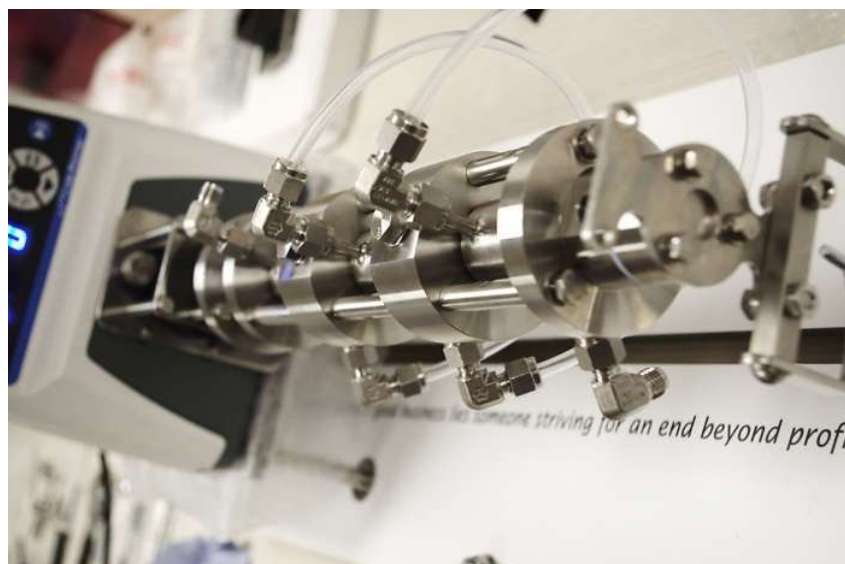

Materials of Construction: Hastelloy C, with PTFE composite seals.

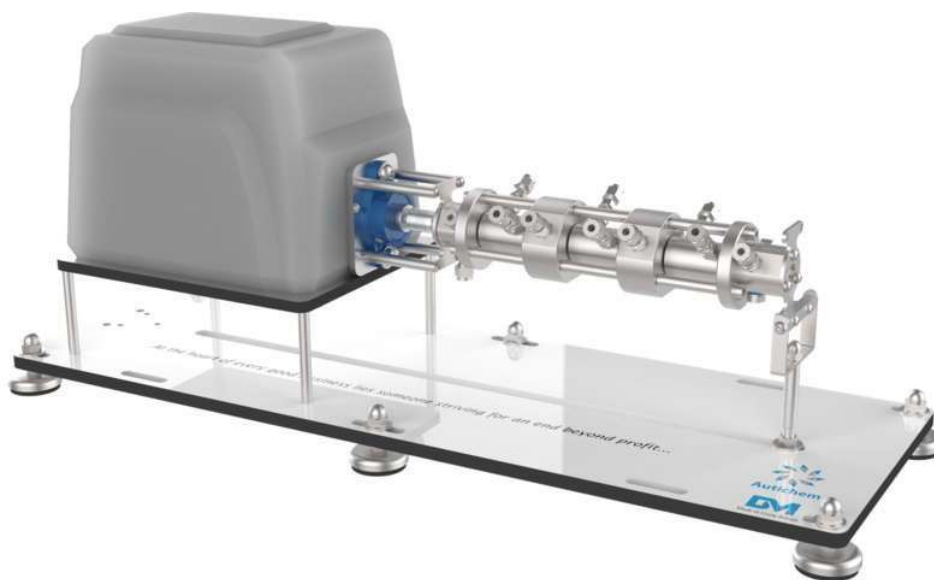

DART Form 1 salient features:

- Integral mag drive agitator
- Compatible with standard Masterflex L/S drives 0-300rpm



- Up to 10 bar operating pressure
- -40 to 200°C temperature range
- Nominal working volume 20ml (larger volumes possible with minimal additional hardware)
- 3 independent heat transfer zones (a, b & c)
- 3 process ports at the inlet and outlet (e & f)
- 2 mid-stage process ports (g & h)
- Special process port design for insertion of temperature probes (probes not included).



- Suitable for a wide range of process operations involving gases, liquids and slurries.
- Available as 1, 2 or 3 stage systems.
- Bespoke designs and special options available.

www.autichem.co.uk

engineering@autichem.co.uk

Tel: +44 (0) 1925 243 398

Document No P20801-1 Rev1